




Outline Dimensions

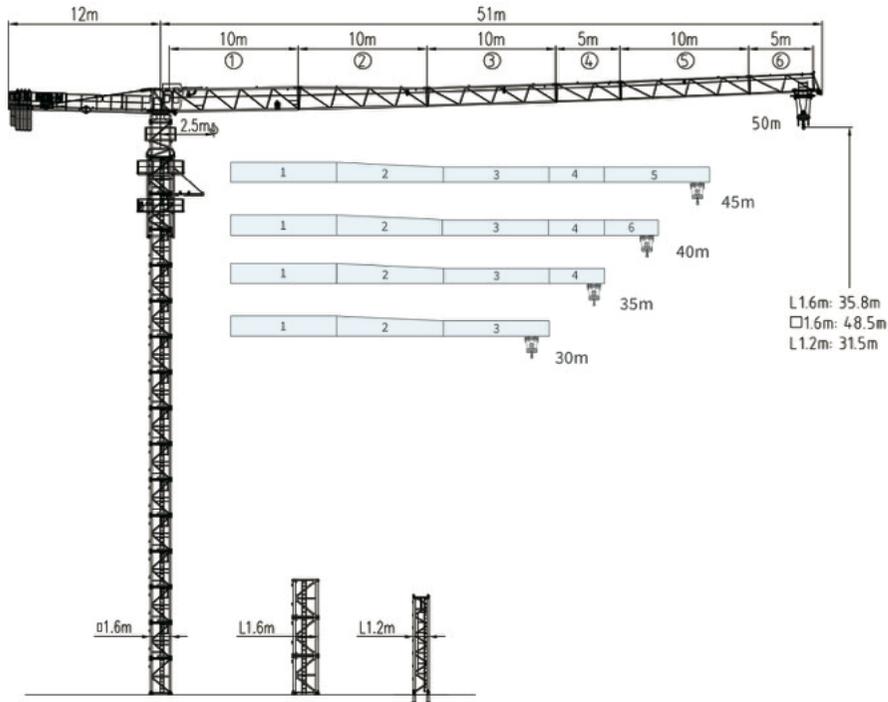

Masts

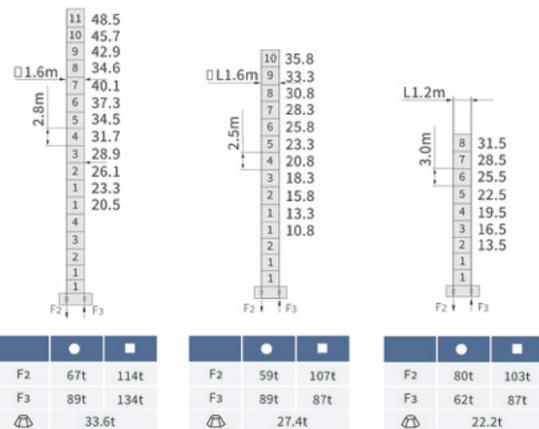

Anchages

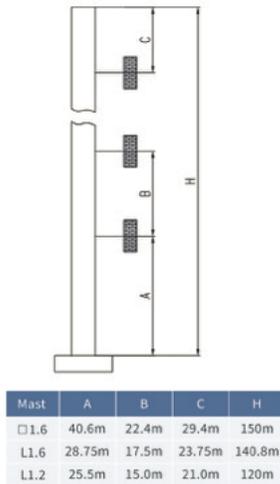

Number of tie collars=(H-A-C)/B+1

● in service Reaction ■ Out of service Reaction

⚠ Total weight of free standing crane(exclude (ounter weight & ballast)

QTZ63
H5013A

DAHAN 大汉科技

Load Diagrams 6t

R _{max}	Fall	RC _{max}	C _{max}	20	25	30	35	40	45	50
50m	☹	14.8	6.0	4.21	3.20	2.54	2.07	1.72	1.45	1.24
	☹☹	26.8	3.0	3.0	3.0	2.60	2.13	1.78	1.51	1.30
45m	☹	15.1	6.0	4.31	3.28	2.61	2.13	1.77	1.50	
	☹☹	27.3	3.0	3.0	3.0	2.67	2.19	1.83	1.56	
40m	☹	15.3	6.0	4.36	3.32	2.64	2.16	1.80		
	☹☹	27.6	3.0	3.0	3.0	2.70	2.22	1.86		
35m	☹	15.5	6.0	4.43	3.38	2.69	2.20			
	☹☹	27.8	3.0	3.0	3.0	2.75	2.26			
30m	☹	15.1	6.0	4.38	3.34	2.60				
	☹☹	27.3	3.0	3.0	3.0	2.66				

Load Diagrams 5t

R _{max}	Fall	RC _{max}	C _{max}	20	25	30	35	40	45	50
50m	☹	17.3	5.0	4.21	3.20	2.54	2.07	1.72	1.45	1.24
	☹☹	31.0	2.50	2.50	2.50	2.50	2.13	1.78	1.51	1.30
45m	☹	17.6	5.0	4.31	3.28	2.61	2.13	1.77	1.50	
	☹☹	31.6	2.50	2.50	2.50	2.50	2.19	1.83	1.56	
40m	☹	17.8	5.0	4.36	3.32	2.64	2.16	1.80		
	☹☹	31.9	2.50	2.50	2.50	2.50	2.22	1.86		
35m	☹	18.1	5.0	4.43	3.38	2.69	2.20			
	☹☹	32.4	2.50	2.50	2.50	2.50	2.26			
30m	☹	17.9	5.0	4.38	3.34	2.66				
	☹☹	30.0	2.50	2.50	2.50	2.50				

Mechanisms 5/6t

Name		☹☹		☹☹☹		☹	Motor power	
		m/min	t	m/min	t			m
Hoisting	5t	18.5LHV12.5	0-62	1.25	0-15.5	5.0	250	18.5
	6t	D22PFC15	0-70	1.5	0-17.5	6.0	400	22
Trolleying	BP4030X	0-40m/min						3.0
Slewing	RVF5.5	0-0.6rpm						5.5
Power	380v(±10%)/50Hz	18.5LHV12.5:27kw/D22PFC15:30.5KW						

Counter weight

			PHZ2600	PHZ1000
50m	11.80m	12400KG	4	2
45m	11.80m	11400KG	4	1
40m	11.80m	10400KG	4	/
35m	11.80m	9800KG	3	2
30m	11.80m	8800KG	3	1

QTZ63
H5013A